

PL 60

HIGH EFFICIENCY CEILING SPEAKER

DESCRIPTION

The PL60 is a ceiling speaker with an elegant design, intended for recess installation in false ceilings or panels. It is ideal for the reproduction of announcements and background music and features a multiplesocket line transformer for use with constant voltage systems.



FEATURES

- 6" fullrange transducer
- Power selectable (70 V / 100 V): 6 W – 3 W – 1.5 W
- 91 dB sensitivity
- Colour white RAL 9003
- Plastic frame, steel grille

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB):	90 Hz ÷ 20000 Hz
	Max SPL @ 1m:	107 dB
	Coverage angle:	90°
	System Sensitivity:	91 dB
Power section	Amplification:	Full Range
	Nominal Impedance:	8 ohm
	Power Handling:	6 W
	Peak Power Handling:	24 W PEAK
	Recommended Amplifiers:	AM 1125, AM 2080, AM 2160, AM 2320, DMA 162, DMA 162P, DMA 82, ES 2160, ES 3080, UP 2162, UP 2321, U
Transducers	Fullrange:	6.0"
Input/Output section	Input connectors:	Screw Terminals
	Output connectors:	Screw Terminals
	Constant Voltage Transformer:	70/100 V
	Power selection 1:	6 W - 1667 ohm
	Power selection 2:	3 W - 3333 ohm
	Power selection 3:	1.5 W - 6667 ohm
Standard compliance	Safety agency:	CE compliant
Physical specifications	Hardware:	Plastic Material
	Color:	White - RAL 9003
Size	Depth:	75 mm / 2.95 inches
	Recessed Depth:	69 mm / 2.72 inches
	Diameter:	204 mm / 8.03 inches
	Weight:	0.34 kg / 0.75 lbs
Shipping information	Package Height:	105 mm / 4.13 inches
	Package Width:	240 mm / 9.45 inches
	Package Depth:	235 mm / 9.25 inches
	Package Weight:	1.07 kg / 2.36 lbs


PART NUMBER


- **13110214**

PL 60



EAN 8024530010102

DRAWINGS






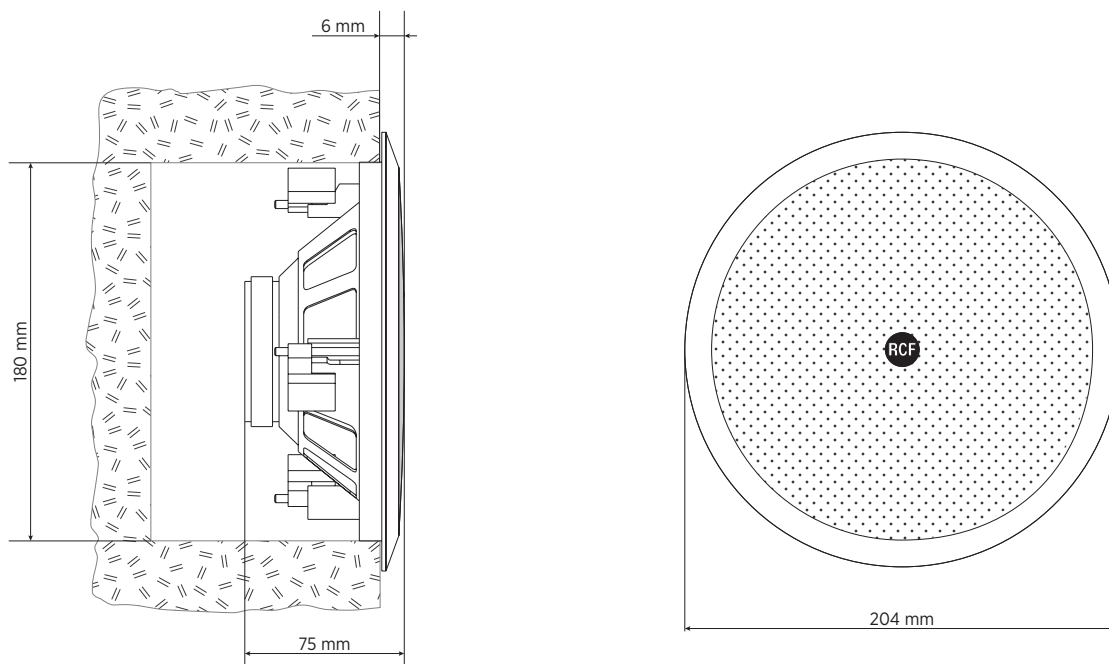


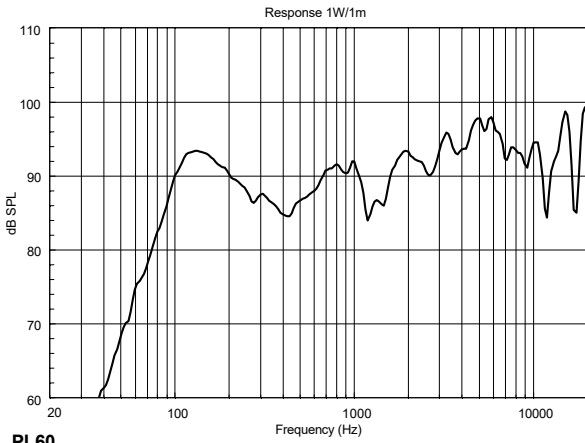

PL60

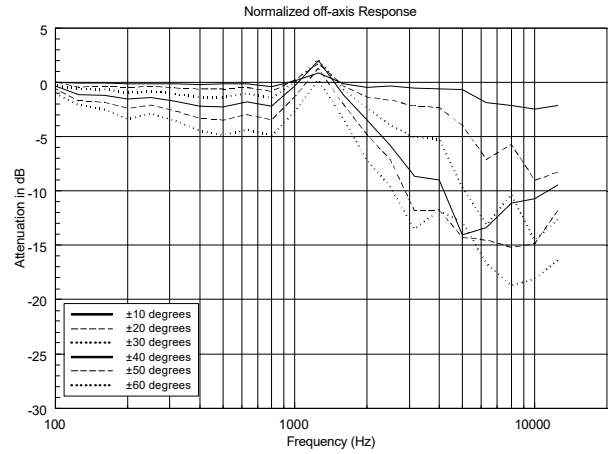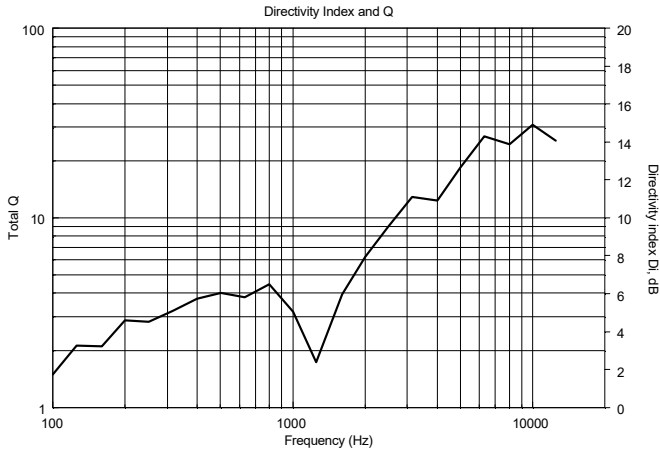

HORIZONTAL 1/3 POLAR PLOT

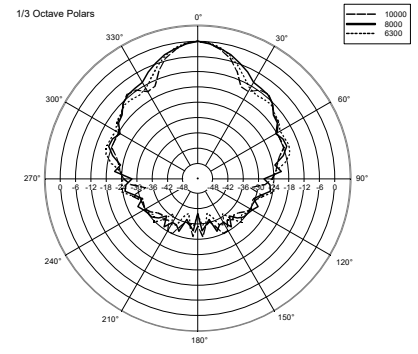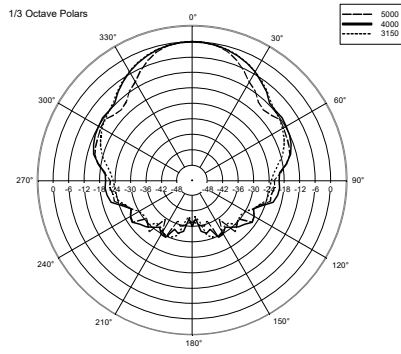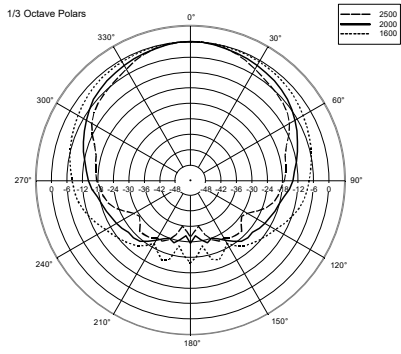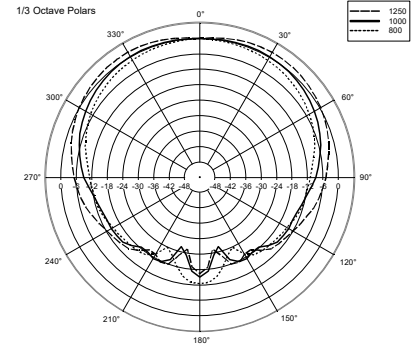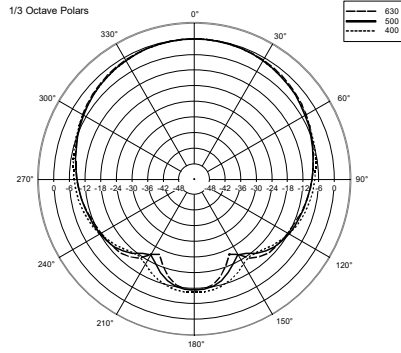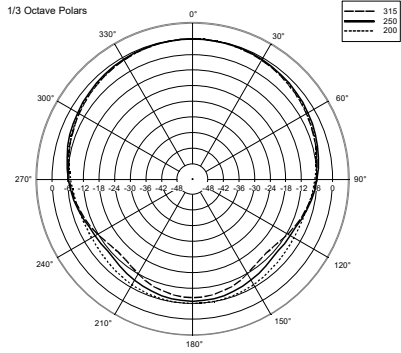

ACCESSORIES



ACCESSORY A 1360

PART NUMBER **13320107**
EAN: 8024530015794
