

D-001R

9000 SERIES PLUG-IN MODULE

The D-001R is a line input plug-in module designed for use with the 9000 Series amplifiers. It has 2-channel unbalanced inputs of RCA jacks. Input signals to both channels are mixed together. The D-001R can process effect for TONE/EQ/COMPRESSOR to two inputs independently.



Article number: D-001R
Alternative products: D-001T


Specifications

Power source	24 V DC
Power source	24 V DC
Frequency response	20 Hz - 20 kHz (+1 / -3 dB)
Frequency response	20 Hz - 20 kHz (+1 / -3 dB)
Distortion	< 0.008 % (at 1 kHz, 20 Hz - 20 kHz BPF, Input sensitivity: -10 dB)
Current consumption (value)	20,0 mA
S/N ratio	70 dB (at 20 Hz - 20 kHz BPF, Input short, Input sensitivity: -10 dB)
Crosstalk	75 dB
Current consumption	20 mA
S/N ratio	70 dB (at 20 Hz - 20 kHz BPF, Input short, Input sensitivity: -10 dB)
Inputs	2 channels, 2 RCA/ch mixed, 10 kOhm#, unbalanced, RCA pin jack
Sampling frequency	48 kHz
Distortion	< 0.008 % (at 1 kHz, 20 Hz - 20 kHz BPF, Input sensitivity: -10 dB)
Equalizer / Filter	Parametric Equalizer: 10 bands, Frequency: 20 Hz - 20 kHz, 31 points, Variable range: ± 12 dB, Q: 0.3 - 5 High-pass filter: -12 dB/oct, Variable frequency range: 20 Hz - 20 kHz, 31 points Low-pass filter: -12 dB/oct, Variable frequency range: 20 Hz - 20 kHz, 31 points Compressor: Depth: 1 - 5
Finish	Aluminium, hairline,
Operating temperature	-10°C to +40°C

D-001R

9000 SERIES PLUG-IN MODULE

Appearance

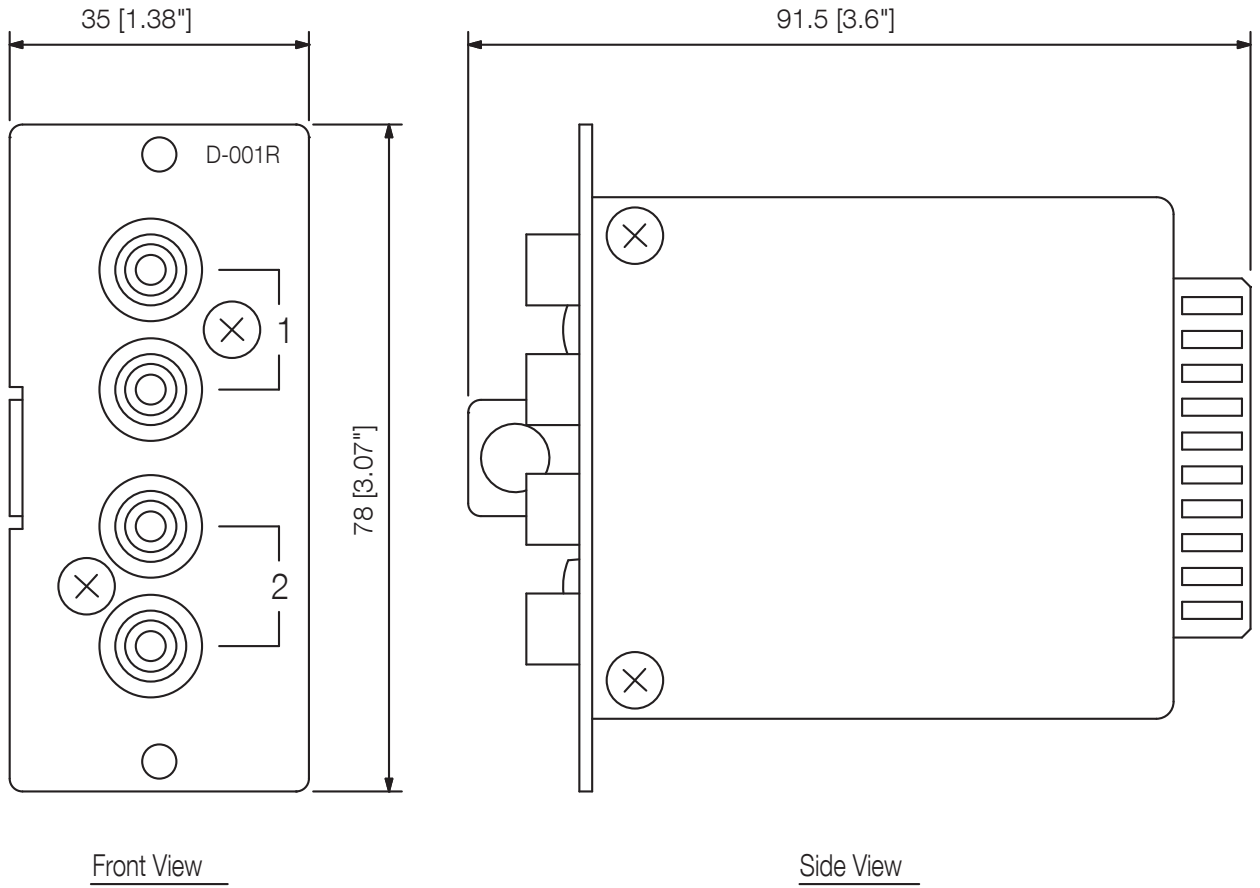

UNIT:mm

SCALE:1/1