

TS-907

INFRARED TRANSMITTER/RECEIVER

The TS-907 Infrared Transmitter/Receiver of the Infrared Conference system is designed for high ceiling applications. Since the system is cordless, it can be easily installed and removed. Communications between the TS-907 and conference units are performed by means of infrared signals and the TS-907 permits transmit and receive with the Central unit. It can be mounted not only to the ceiling and wall but on the microphone stand.



Article number: TS-907
Alternative products: TS-905


Specifications

Power source	24 V DC (supplied from the central unit)
Current consumption	180,0 mA
Connection	BNC jack
Dimensions	120 x 71.3 mm (Ø x H)
Gross weight	0,65 KG
Finish	ABS resin, black,
Weight	0.23 kg

TS-907

INFRARED TRANSMITTER/RECEIVER

Appearance

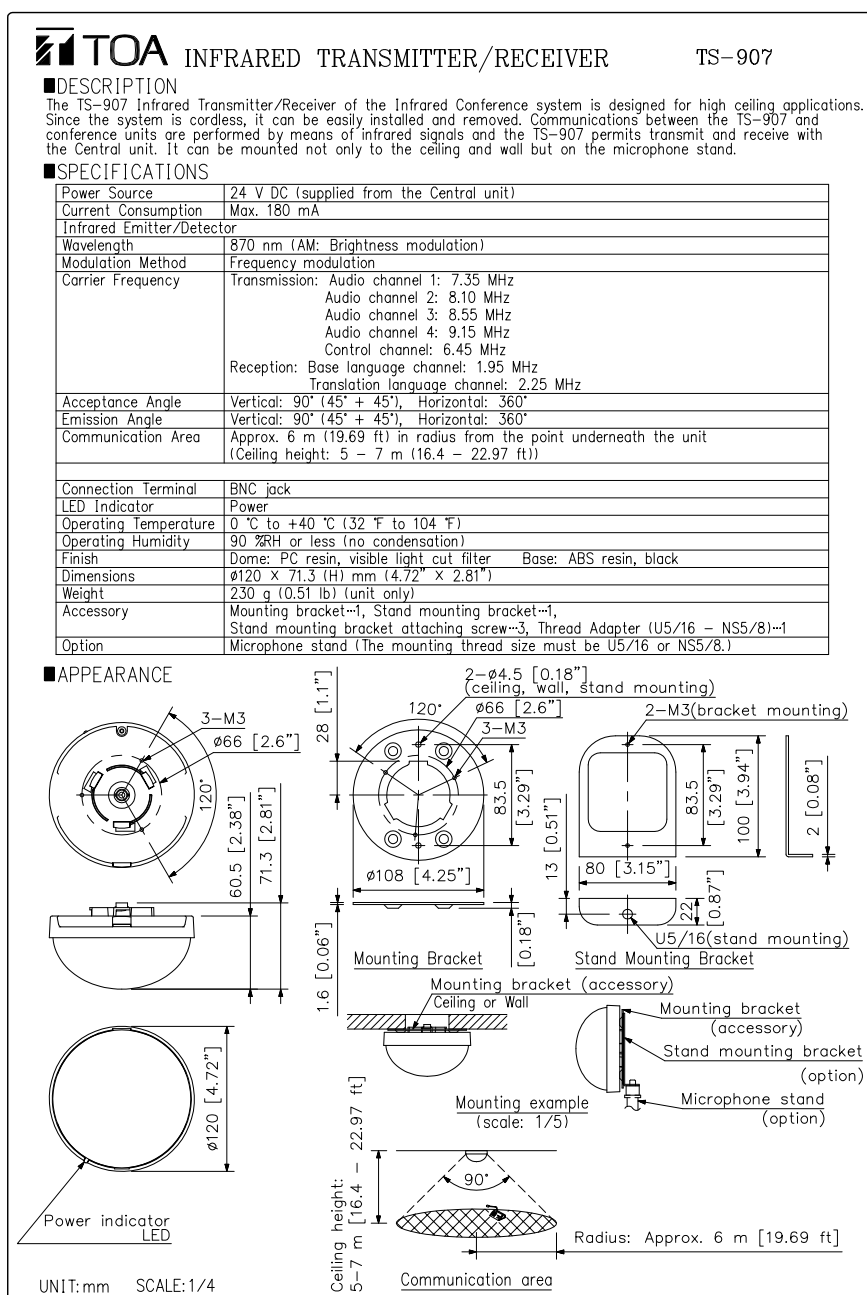

05L

TOA Corporation

DWG No: GTS00QA1-5