


SPOT-2010T/EN5424

EN 54-24 Projector-Speaker for Outdoor Use
in ABS / ALU with 20 Watt Power


EN
54-24

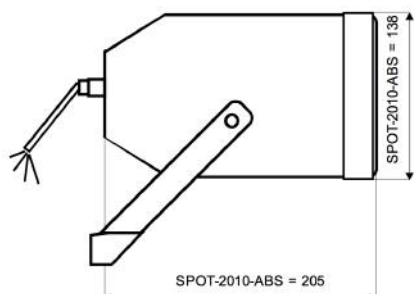

TECHNICAL DATA

SPOT-2010T/EN5424

Loudspeaker:	130mm - broadband
Power-Consumption:	100V-20-10-5W
Frequency-Range:	110-17 000 Hz
EN-Sensitivity 1W/4M:	78 dB
SPL max 20W/4M:	91,8 dB
SPL 1W/1M max. EASE/Ulysses:	100 dB (3,8 kHz)
SPL 20W/1M max. EASE/Ulysses:	112 dB (3,8 kHz)
Radiation H (0,5/1/2/4KHz):	180°/180°/80°/75°
Radiation V (0,5/1/2/4KHz):	180°/180°/80°/75°
EN degree:	EN Typ B, weather-proof, outdoor certificated
Dimension:	138 x 205 mm
Weight:	1,6 kg
Material:	ABS / ALU
Color:	white
Certificate-Nr.:	1293-CPR-0568
Order-Nr.:	SPOT-2010T/EN5424




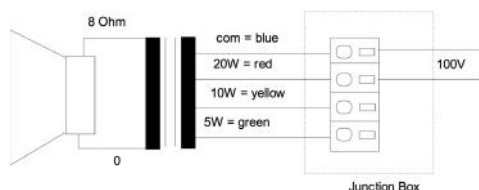


- Directivity for Speech-application
- Flame retardent material acc. to EN 60695-11-20, 5VB
- Splash-water-protected ABS-case
- Alu-bracket, Alu-bracket & V2A/SS304 screws
- Three touch-secure 100V-tappings via cable & junction box
- Special DIN 912-ISO 4762 screws
- Optional ceramic-clamp & thermal fuse by request

SPOT-2010T/EN5424

EN 54-24 Projector-Speaker for Outdoor Use
in ABS / ALU with 20 Watt Power

Radiation

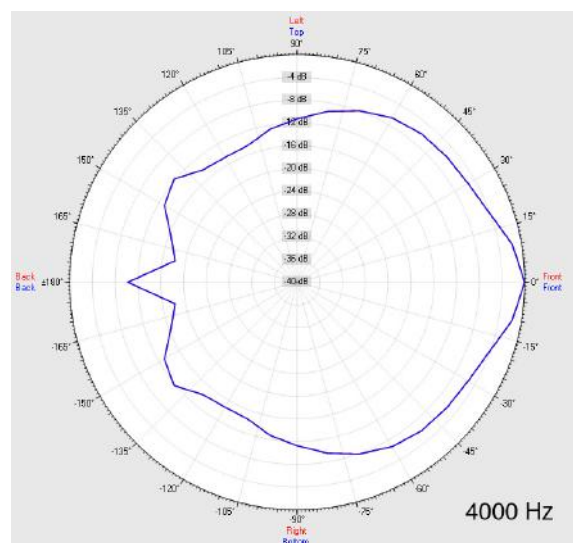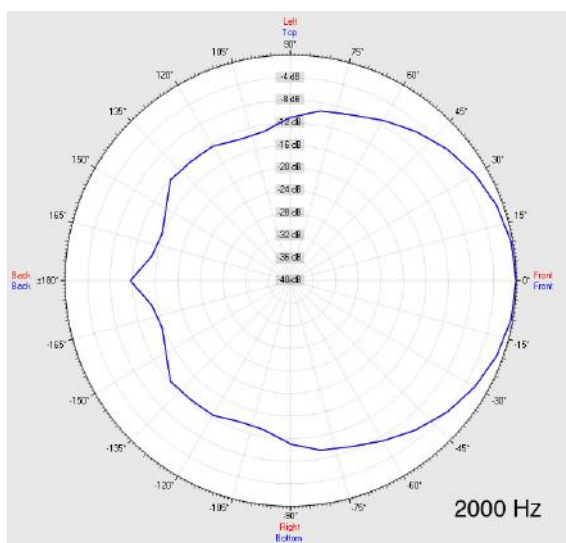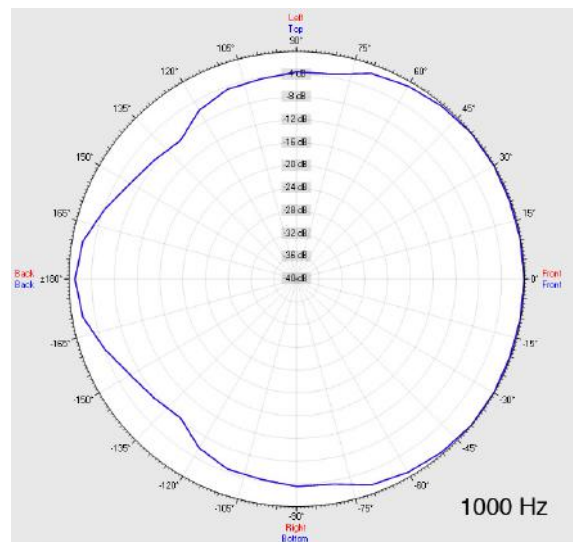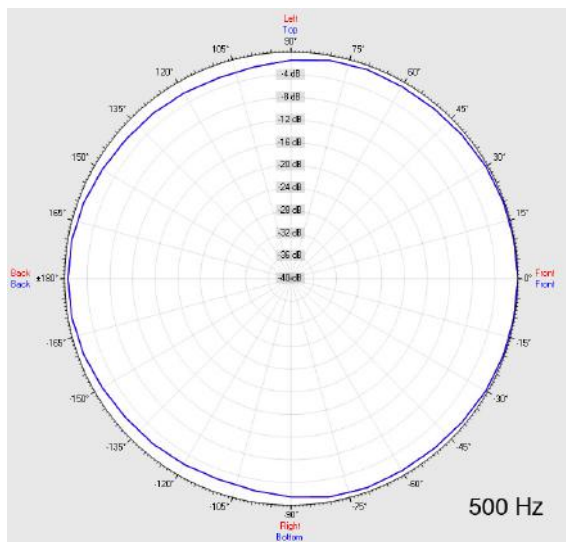

Test method	Axis	500 Hz	1000 Hz	2000 Hz	4000 Hz
EN 54-24	HOR	180°	180°	80°	75°
EN 54-24	VER	180°	180°	80°	75°
EASE/Ulysses	HOR	360°	240°	110°	100°
EASE/Ulysses	VER	360°	240°	110°	100°


SPOT-2010T/EN5424

EN 54-24 Projector-Speaker for Outdoor Use
in ABS / ALU with 20 Watt Power



Elektroakustische Komponenten

Isobar-Diagramm

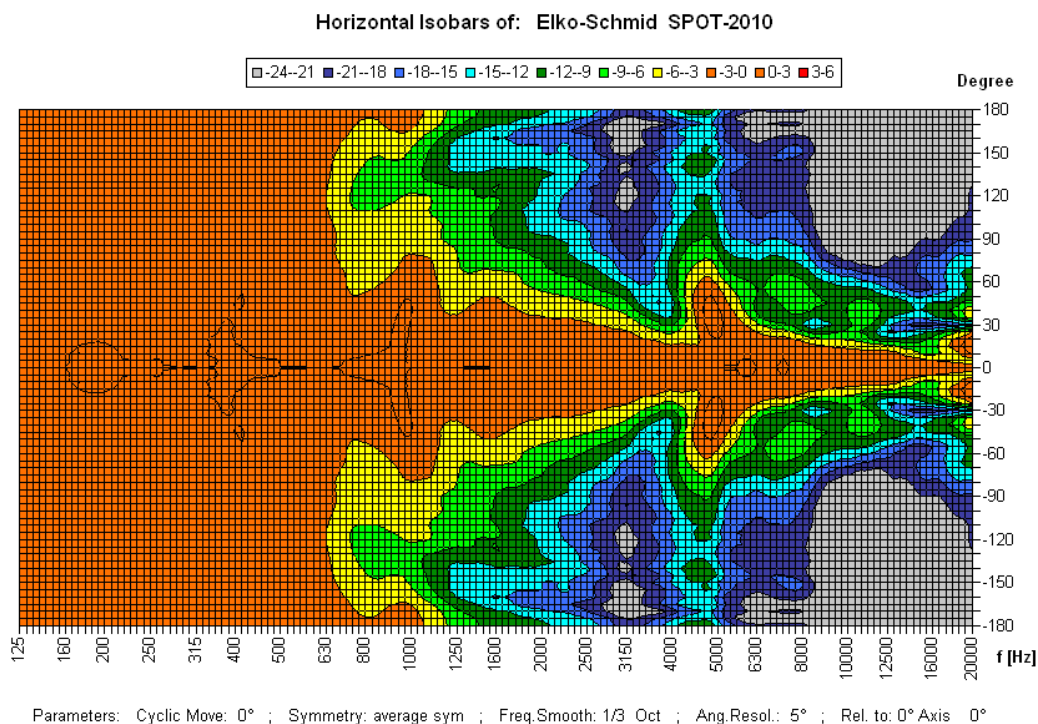

CE

1293

Elko Schmid GmbH & Co. KG
Glauchauer Str. 30, D-08058 Zwickau

10

DoP: 498058129314-OWS-PN-0022

EN 54-24

Loudspeaker for voice alarm systems for
fire detection and fire alarm systems for buildings

SPOT-2010T/EN5424

Intended Option:
Type B