
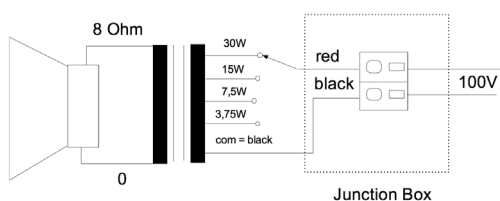

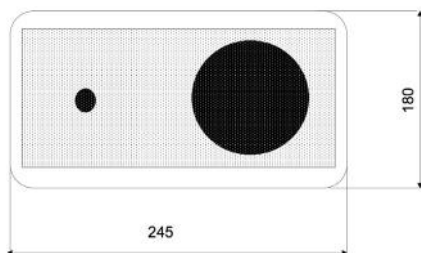


# ML-260WT/EN5424

EN 54-24 On-Wall / On-Ceiling - Speaker for Outdoor Use  
in ABS with 30 Watt Power

EN  
54-24

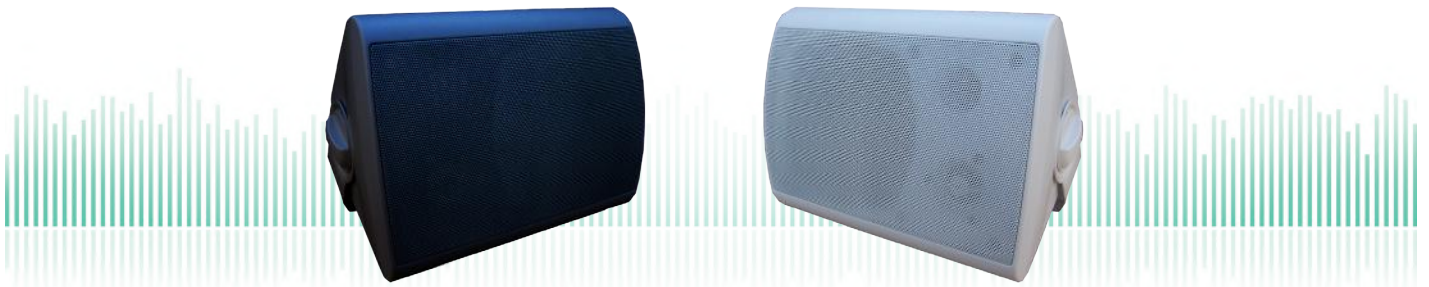

## TECHNICAL DATA

## ML-260WT/EN5424

Loudspeaker:	2-Way - System
Power-Consumption:	100V-30-15-7,5-3,75W
Frequency-Range:	60-20 000 Hz
EN-Sensitivity 1W/4M:	72 dB
SPL max 30W/4M:	87 dB
SPL 1W/1M max. EASE/Ulysses:	93 dB (5,5 kHz)
SPL 30W/1M max. EASE/Ulysses:	108 dB (5,5 kHz)
Radiation H (0,5/1/2/4KHz):	360°/190°/118°/96°
Radiation I V (0,5/1/2/4KHz):	360°/220°/238°/200°
EN degree:	EN Type B, weather-proof, outdoor-certificated
Dimension:	245 x 180 x 165 (185) mm
Weight:	2,6 kg
Material:	ABS
Color:	black or white
Certificate-Nr.:	1293-CPR-0495
Order-Nr.:	ML-260WT/EN5424-BK ML-260WT/EN5424-WH

- Weather-proof through Alu-Grill, Alu-Bracket & Stainless Steel Screws
- Spezial DIN 912-ISO 4762 screws
- Very fast mounting through wall mounting bracket
- Quick power-change through rotary switch on rear panel
- Flame retardent material acc. to EN 60695-11-20, 5VB
- 100V-tappings with junction box
- Ceramic clamp & thermal fuse by request





# ML-260WT/EN5424

EN 54-24 On-Wall / On-Ceiling - Speaker for Outdoor Use  
in ABS with 30 Watt Power



Elektroakustische Komponenten

## Radiation

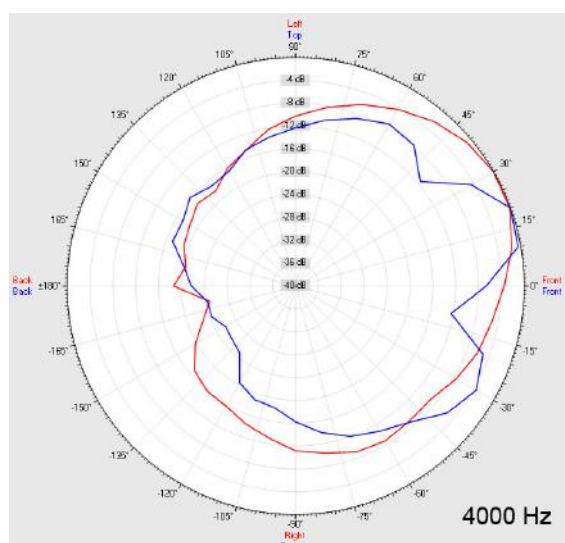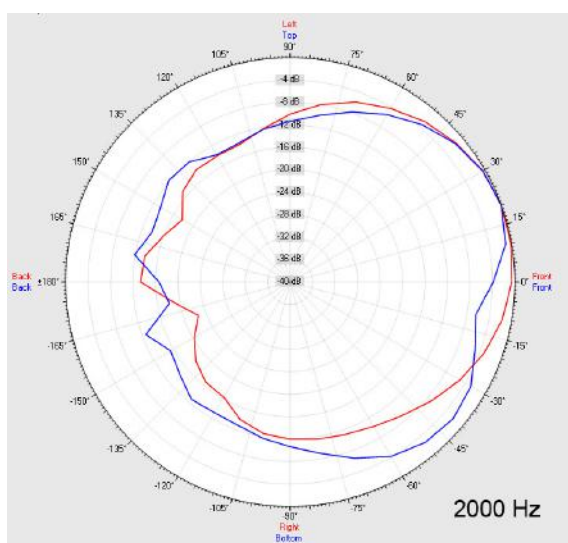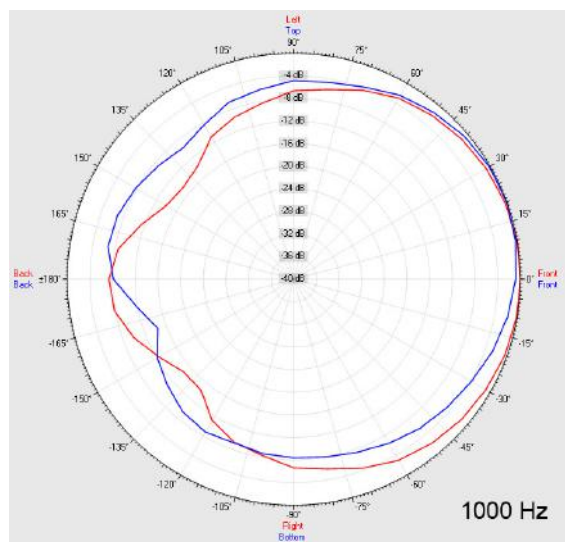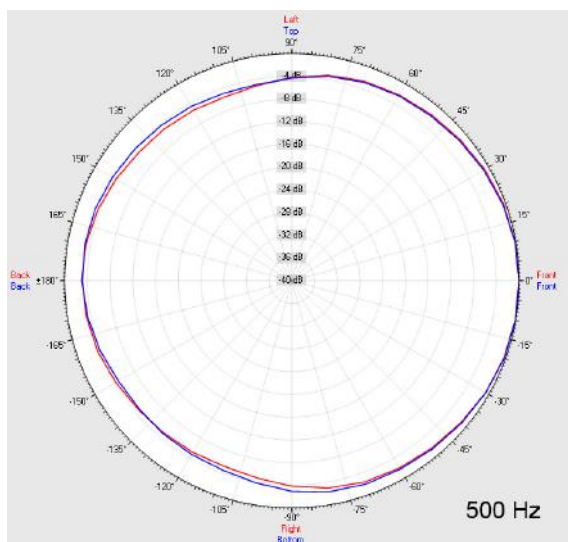

Test method	Axis	500 Hz	1000 Hz	2000 Hz	4000 Hz
EN 54-24	HOR	360°	190°	118°	96°
EN 54-24	VER	360°	220°	238°	200°
EASE/Ulysses	HOR	360°	180°	85°	90°
EASE/Ulysses	VER	360°	160°	160°	100°



# ML-260WT/EN5424

EN 54-24 On-Wall / On-Ceiling - Speaker for Outdoor Use  
in ABS with 30 Watt Power



Elektroakustische Komponenten

## Isobar-Diagramm

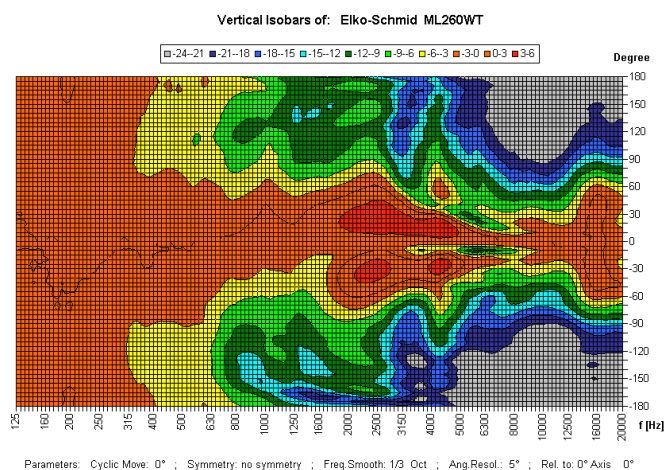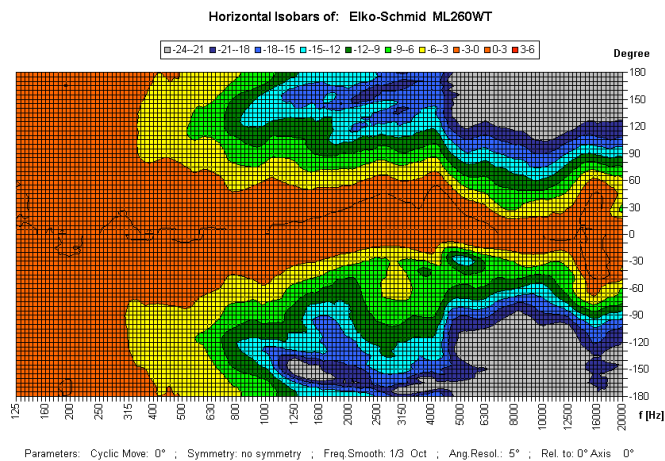

CE

1293

Elko Schmid GmbH & Co. KG  
Glauchauer Str. 30, D-08058 Zwickau

15

DoP: 498058129314-OWS-PN-0027

EN 54-24

Loudspeaker for voice alarm systems for  
fire detection and fire alarm systems for buildings

ML-260WT/EN5424

Intended Option:  
Type B