


DESCRIPTION

The TS-912 is a Delegate unit with voting function that can be connected to the conference system by a cable. The TS-912 is directly connected to the TS-919B1 or TS-919B4 Bridge unit, then to the TS-910 Central unit via the TS-918 Expansion unit.
Either the standard type or long type can be selected for the microphone.

SPECIFICATIONS

Power Source	24 V DC (supplied from the TS-918 Expansion Unit (option))
Current Consumption	Max. 60 mA
Modulation Method	Frequency modulation
Carrier Frequency	Transmission: Audio channel 1: 7.35 MHz Audio channel 2: 8.10 MHz Audio channel 3: 8.55 MHz Audio channel 4: 9.15 MHz Control channel: 6.45 MHz Reception: Base language channel: 1.95 MHz Translation language channel: 2.25 MHz
Input	Microphone terminal: XLR-4-31 type
Output	Monitor speaker: 8 Ω , 0.2 W Headphone: ϕ 3.5 mm mini Jack (3P:monaural) $\times$ 2
Connection Terminal	RJ45 connector
LED Indicator	Speech indicator (flashes at communication failure), Voting status indicators 1 -3, Power indicator (flashes at communication failure)
Function	Monitor volume control, Headphone volume control, Voting function, Monitor selector switch (MAIN/SUB)
Operating Temperature	0 $^{\circ}$ C to +40 $^{\circ}$ C (32 $^{\circ}$ F to 104 $^{\circ}$ F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Top panel: ABS resin, gray metallic, paint, semi-gloss
Dimensions	210 (W) $\times$ 68.6 (H) $\times$ 152 (D) mm (8.27" $\times$ 2.7" $\times$ 5.98")
Weight	570 g (1.26 lb)
Option	Microphone: TS-903, TS-923, TS-904, TS-924 (Select either one.)

APPEARANCE

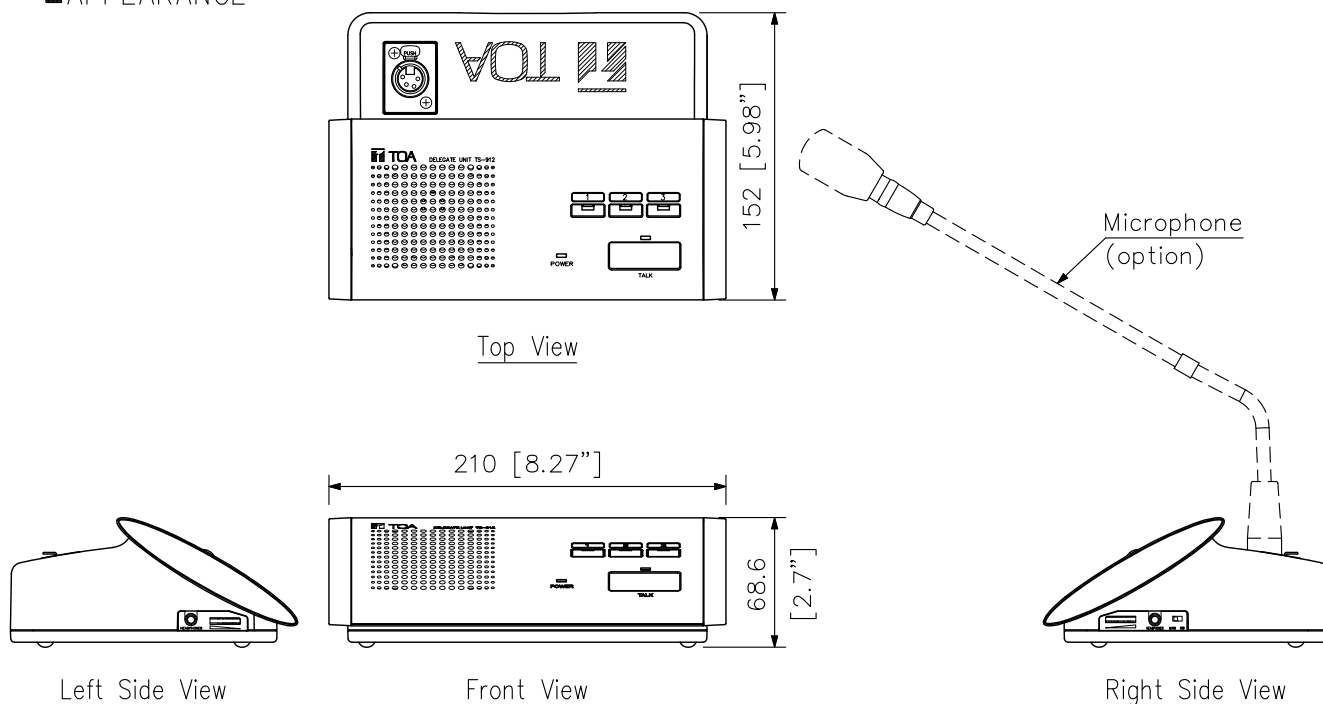

UNIT:mm SCALE:1/4