

# PC-2668

## PANEL CONE SPEAKER

The PC-2668 speaker can be mounted (exposed installation) to the ceiling where flush mounting is impossible. It can be easily installed thanks to its spring catch method. Push-in connector allows quick wire connection, and speaker lines can be bridged by bridging terminals. The supplied bracket can be mounted to a flush-mount pull box.



Article number: PC-2668 EU  
Alternative products: PC-2668, PC-2852, PC-2869


### Specifications

Frequency response	100 Hz - 16 kHz
Sensitivity (1#V, 1#n)	90 dB
Rated input (High Impedance)	6 W
Tappings	6 / 3 / 1.5 / 0.8 W (100 V), 3 / 1.5 / 0.8 / 0.4 W (70 V)
Speaker component	12 cm dynamic cone-type
Certificates	Ease
Dimensions	260 x 202 mm (Ø x D)
Gross weight	1,2 KG
Finish	ABS resin, off-white (RAL 9010 or equivalent),
Weight	0.82 kg

# PC-2668

## PANEL CONE SPEAKER

### Appearance

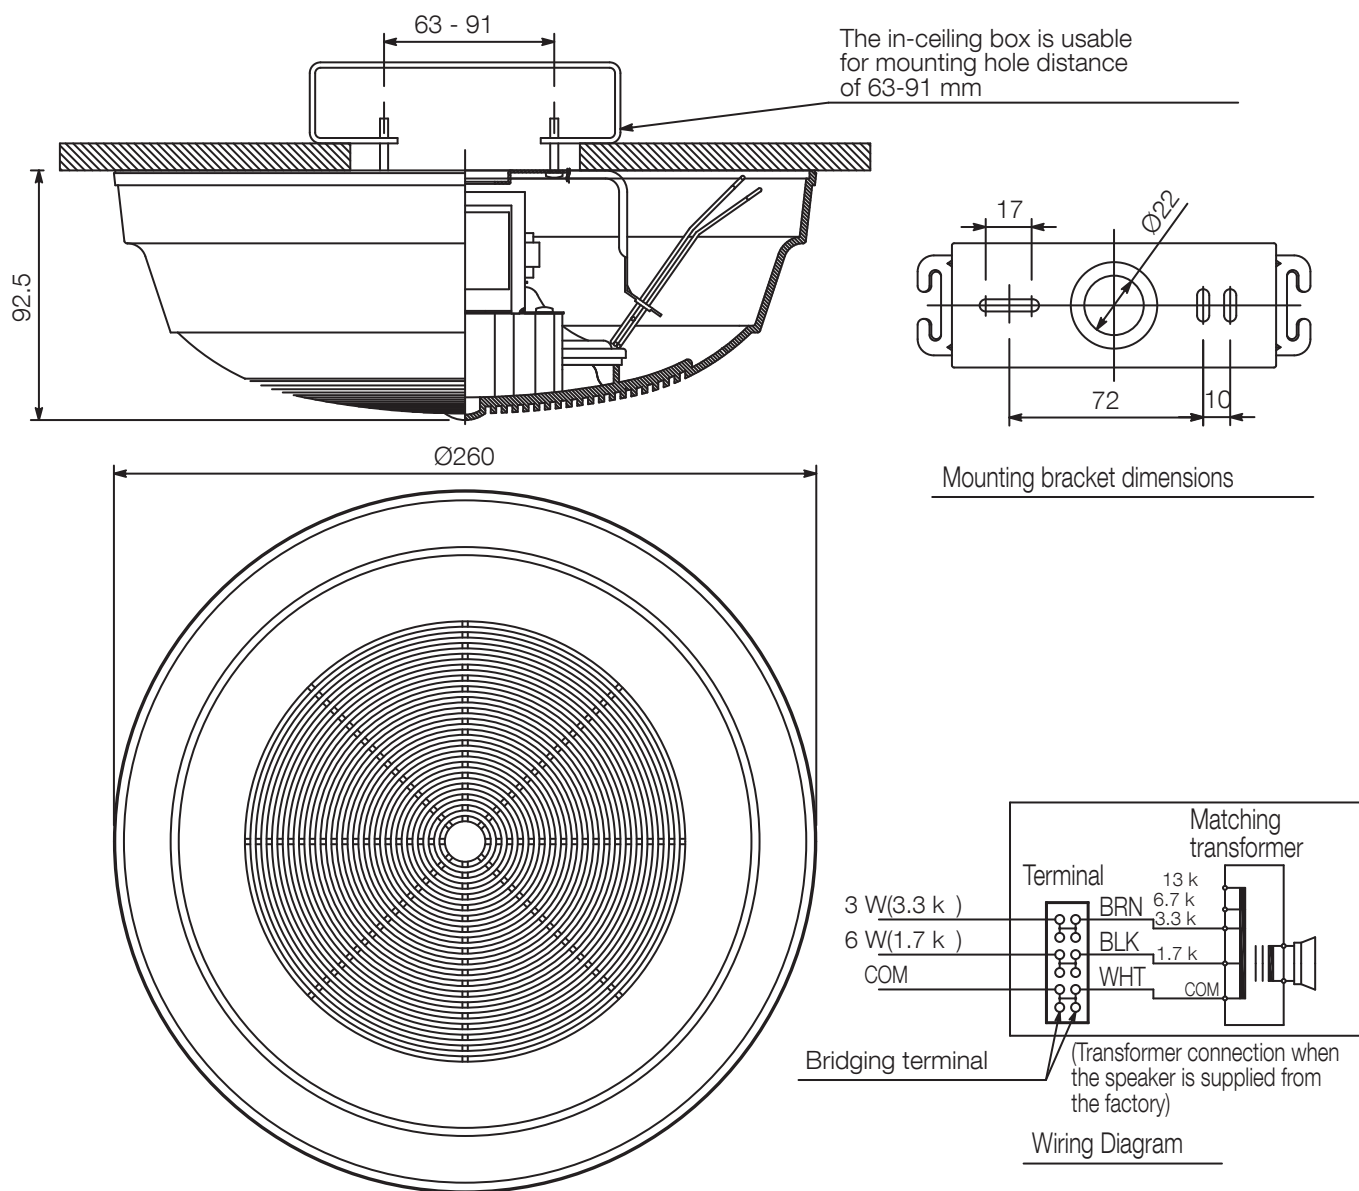

UNIT:mm

SCALE:1/3

[Note] Use transformer terminals when changing input impedance.