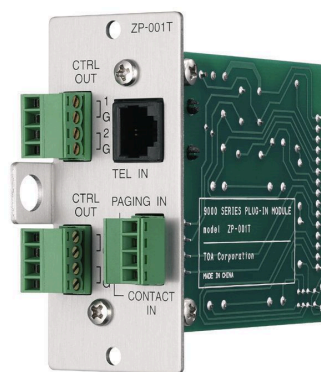# ZP-001T
9000 SERIES PLUG-IN MODULE

The ZP-001T is a Zone paging module designed for use with the 9000 Series amplifiers and functions as interface to connect the 9000 Series amplifier to an analog PABX, allowing zone paging to be initiated from the PABX. There are two operation modes: ring signal and paging port modes. Broadcast can be initiated regardless of operation mode.
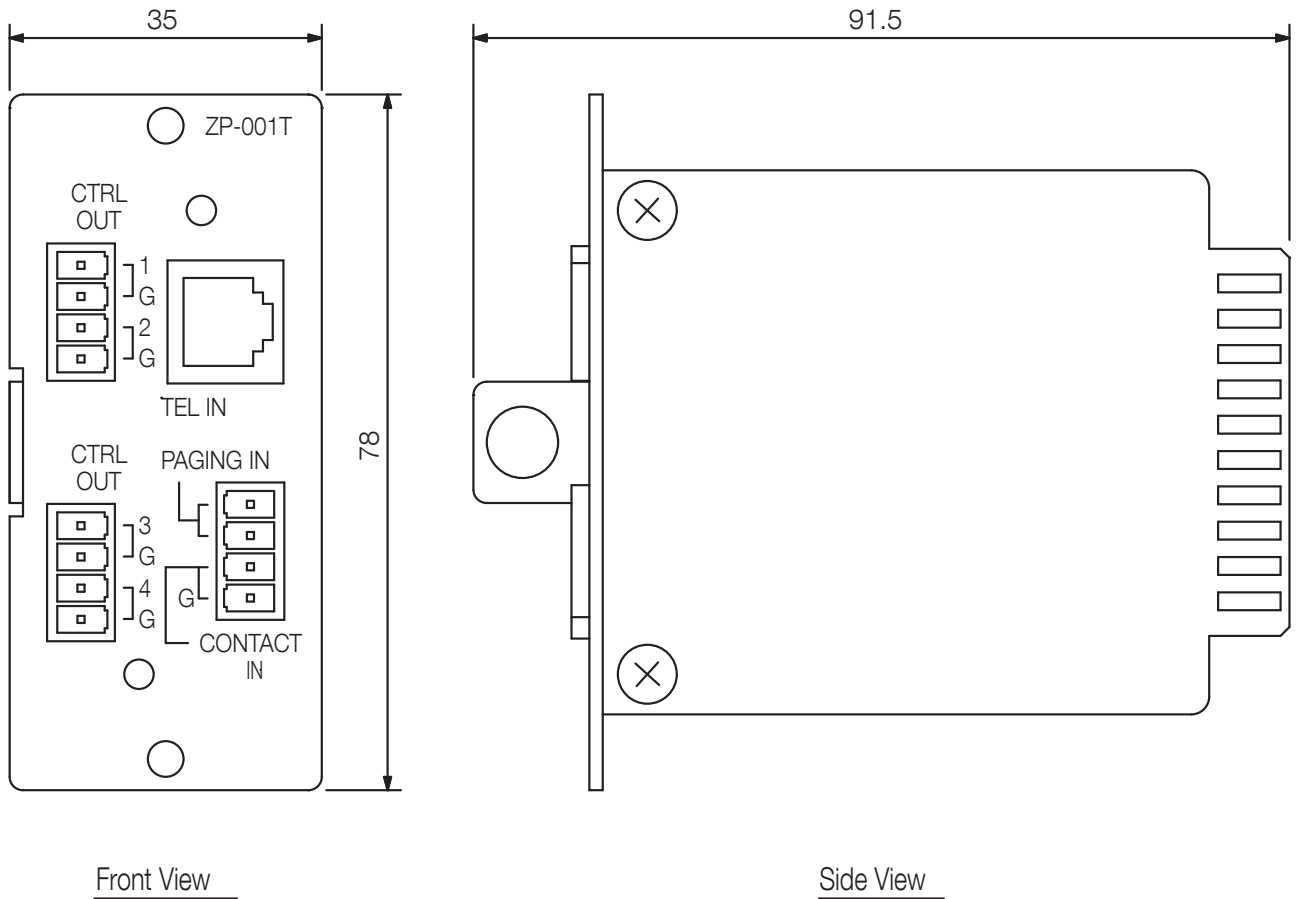
Article number:ZP-001T

Specifications

Power source	24 V DC
Current consumption	38,0 mA
Operating temperature	-10 °C to +40 °C
Inputs	0 dB, 600 Ohm, balanced, transformer-isolated audio input, removable terminal block (4 pins)
Controls	Control input: 1 channel, no-voltage make contact, open voltage: 5 V DC, short-circuit current: 0.5 mA, removable terminal block (4 pins) Control output: 4 channels, open collector output (isolated), withstand voltage: 35 V DC, control current: max. 50 mA, removable terminal block (4 pins)
Dimensions	35 x 78 x 91.5 mm (W x H x D)
Gross weight	0,19 KG
Finish	Aluminium, hairline,
Weight	153 g

We supply sound, not equipment.
www.toa.eu.

ZP-001T
9000 SERIES PLUG-IN MODULE

Appearance

35

ZP-001T

CTRL OUT

1
G

2
G

TEL IN

CTRL OUT

3
G

4
G

PAGING IN

G

CONTACT IN

78

Front View

91.5

Side View

UNIT:mm   SCALE:1/1